

DVK128Z

Multi Function Keyboard Controller



FEATURES

- Capable of Controlling Speed Dome camera, DVR, and Monitor
- 3D Joystick Control of PTZ function
- LCD Display (20 x 2 lines).
- Multi-Protocol Support (Pelco P, Pelco D)
- Jog Shuttle Control of DVR
- Password protection to prevent unauthorized intruder
- Customized, upgradeable firmware for specific applications
- Matrix control (TelView DVR series products)
- Ergonomic buttons placement with sound indication for easy usage
- Access OSD form of connected devices with control key mapping
- Two independent Communication ports with selectable baud rate from 1200 bps to 38400 bps
- Naming of connected camera for easy reorganization
- Auto tracking by external signal processor unit

MULTI-FUNCTION KEYBOARD CONTROLLER

The multi-function keyboard controller, DVK128Z is designed to control speed domes, DVRs, cameras, monitors. The DVK128Z keyboard controller provides a user friendly interface which allows preferential programming extending the units flexibility. Local alarm signals can be carried out to a remote operation center through two RS-485/232 paths.


The alarm signals can be customized to connect the different devices. There are 3 hot keys for calling the camera, DVR and monitor functions, allowing you to switch functions without interruption. The DVK128Z keyboard controller is capable of controlling a speed dome's pan and tilt movement with variable speeds from 0.1/sec to 360/sec as well as its zoom, focus and iris. Most commands can be easily performed by a one-touch button. Up to 8 DVK128Z multi-function keyboard controllers can be cascaded to control simultaneously from distant places.

TelView believes even the most powerful system is pointless if it isn't easy to install, configure, and easily operate. DVK128Z's easy installation and simple operations give you an excellent solution to integrate and control security devices.


SPECIFICATIONS

Input Voltage	DC 12V
Power Consumption	10 W
Device Control	PTZ Speed Dome, DVR & Monitor
Protocols	Pelco-D, Pelco-P Protocol
Remote Control	RS-232 / RS-485
Baud Rate	1200 ~ 38400
LCD Display	20 x 2 Character
Integration	Up to 8 Keyboard cascading connection
Auto Surveillance	Position, Tour, Auto Pan.
Wiring Box	Yes
Operating Temperature	0° C ~ 40° C
Operating Humidity	< 95 %
Dimension	380 (W) x 180 (H) x 95 (D)
Weight	1.5 Kg

SYSTEM CONNECTION

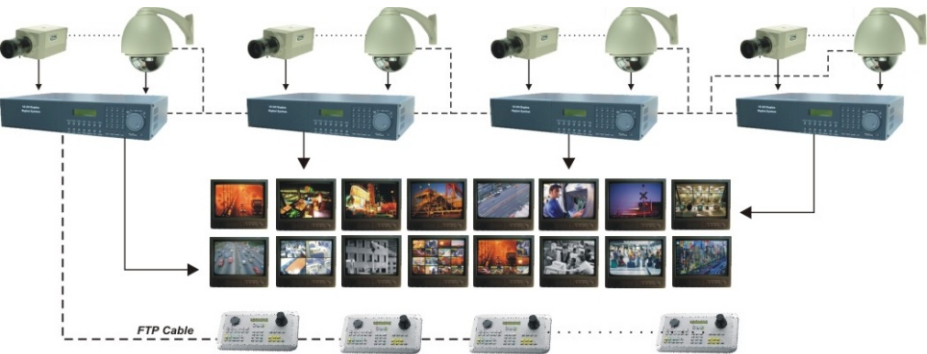

PANEL

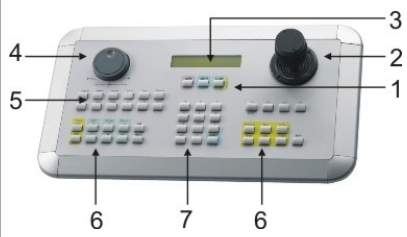

- 1 Main Function keys
- 2 Three-way joystick
- 3 LCD Panel
- 4 Jog and Shutter
- 5 DVR reserved Keys
- 6 Speed Dome reserved keys
- 7 Number keys

